




Cable Plano UL2651 28AWG PH=1.27mm



IA



IA

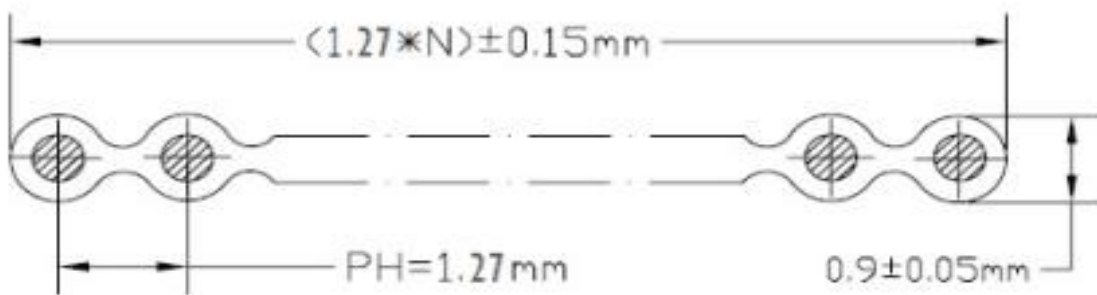

SEC:A-A

NOTE:

1. CONDUCTOR: 28AWG TC 7/ ϕ 0.125 \pm 0.005mm;
2. JACKET: 45Pa 105°C UL-PVC, AVG. THICK.: 0.26mm MIN. THICK.:0.18mm
 COLOR: GREY#(HALF ATOMIZER), PH=1.27mm,
 $\square D = (1.27 * N) \pm 0.15 * 0.9 \pm 0.05 \text{ mm}$.
3. ELECTRIC FUNCTION: CONDUCTOR RESISTANCE: MAX.:237.25 OHM/KM, 20°C
 INSU. RESISTANCE: MIN.:20M OHM/KM, 20°C
 DIELECTRIC STRENGTH: AC 1000V. 1min

REV NO: A0	PART NO:	CUSTOMER: 000
ITEM NO: UL2651 28AWG NPIN FLAT CABLE		DATE: DEC14,2010
DRAWING: RLM	ENGINEER:	MANAGER: