

fullwat[®]



FU-CLI1500-1621

1.0 INPUT

- 1.1 Voltage
- 1.2 Frequency
- 1.3 Current
- 1.4 Inrush current
- 1.5 Power efficiency

2.0 OUTPUT

- 2.1 charge curve
- 2.2 Led display

3.0 PROTECTION

- 3.1 Over voltage protection
- 3.2 Short circuit protection
- 3.3 Output reverse input protection

4.0 HI-POT:

4.1 HI-POT

5.0 ENVIRONMENT:

- 5.1 Ambient operation temperature
- 5.2 Ambient operation relative humidity
- 5.3 Ambient storage temperature
- 5.4 Ambient storage relative humidity

6.0 DROP TEST

7.0 VIBRATION TEST

8.0 MTBF

9.0 OUTLINE

1.0 INPUT

1.1 Voltage

Minimum	Normal	Maximum	Unit
100	115/230	240	Vrms

1.2 Frequency
47Hz~63Hz

1.3 Current
1.5A.(MAX)


1.4 Inrush current

115V/40A(max.), 230V/80A(max.)
at 25°C at cold start.

1.5 Power efficiency
80% (min.) at full load, 110Vac or 230Vac 50Hz.

2.0 OUTPUT

2.1 Charge curve

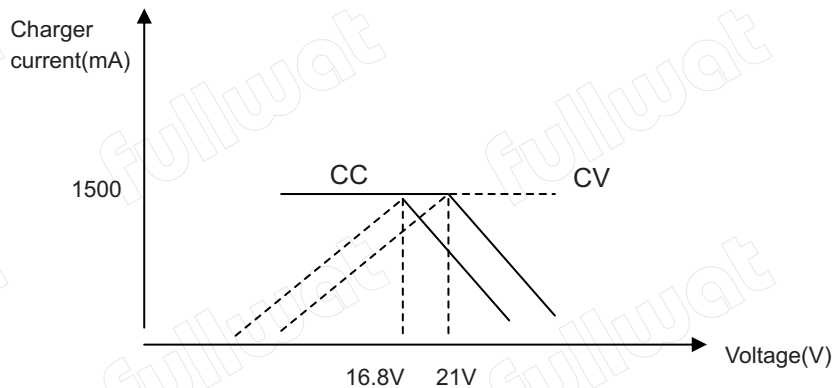

2.1.1 Auto-switching output voltage:

1. 16.8+/-1%V at standby
2. 21+/-1%V at standby

2.2 Led display

Green on standby

Red on charging

Green on full charge when charging current drop to 150+/-15mA.

3.0 PROTECTION

3.1 Over voltage protection

Output over voltage protection with zener diode.

3.2 Short circuit protection

The output short to ground, it will auto-recovery without damage.

3.3 Output reverse input protection

When output reverse input, the unit and the battery will be no damage.

4.0 HI-POT**4.1 HI-POT**

4.1.1 P~S:1800Vac 3S, the leakage current is lower than 10mA;;

5.0 ENVIRONMENT:**5.1 Ambient operation temperature**

0°C to +40°C

5.2 Ambient operation relative humidity

20% to 85%

5.3 Ambient storage temperature

-40°C to +70°C

5.4 Ambient storage relative humidity

10% to 95%

6.0 DROP TEST

6.1 Freely drop the wooden board from the height of 75cm for two times per side(front/back/left/right).

7.0 VIBRATION TEST

7.1 Vibration frequency:5-60-5Hz with 10 octave/min@2.1G

7.2 Three circles per axis(X,Y,Z) for 10minutes

8.0 MTBF

40,000 hours base on bellcore TR332 document required at 25°C.

9.0 Outline

9.1.Outline dimension: 120L X 60W X 38(H) mm MAX;

9.2.Profile:surface smooth ,no scar and mechanical damage.