## NEUTRIK



## NA3FF

3 pole XLR female - 3 pole XLR female

Gender conversion adapter

## **Features & Benefits**

- Versatile, pre-wired and ready to use adapters to reliably interlock various connector systems
- Rugged diecast shell for best reliability

 Professional look and compact space saving design, based on the XX Series



## **Technical Information**


Product	
Title	NA3FF
Connection Type	Adapter


Electrical	
Contact resistance	≤ 3 mΩ
Dielectric strength	1,5 kVdc
Insulation resistance	> 2 GΩ

Mechanical	
Wiresize	
Locking device	Latch lock

Material	
Contact plating	2 μm Ag
Contacts	Bronze (CuSn6)
Insert	Polyamide (PA 6.6 30 % GR)
Shell	Zinc diecast (ZnAl4Cu1)
Shell plating	gal Cu/Ni

Environmental	
Temperature range	-20 °C to +65 °C

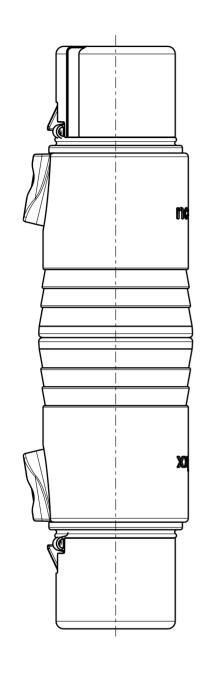

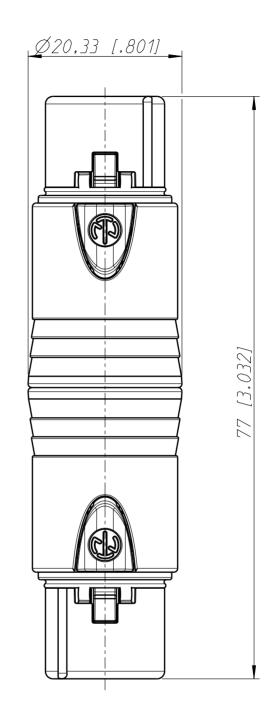

Allgemeintoleranzen ISO 2768-m	Werkstoff	Massstab:		Datum	Name
			Gezeichnet	30.01.06	Ender
Zeichnung urheberrechtlich	KE IN_MA T	2:1	Freigegeben	-	-
geschuetzt (DIN 34) (C)	-	(A4)	Geaendert	-	-
Benennung NA 3FF			AendNr.		AendIndex
NA 3FF			Ersatz fuer:		Blatt 1 von 1 Bl.
MEUTRIK 1	Zeichn. Nr. ST_N/A3FF				