



NA3FM

3 pole XLR male - 3 pole XLR female (extension adapter)

Features & Benefits

- Versatile, pre-wired and ready to use adapters to reliably interlock various connector systems
- Professional look and compact space saving design, based on the XX Series
- Rugged diecast shell for best reliability.

Technical Information


Product	
Title	NA3FM
Connection Type	Adapter

Electrical	
Contact resistance	$\leq 3 \text{ m}\Omega$
Dielectric strength	1,5 kVdc
Insulation resistance	$> 2 \text{ G}\Omega$

Mechanical	
Wiresize	
Locking device	Latch lock

Material	
Contact plating	2 μm Ag
Contacts	Bronze (CuSn6) (female)
Insert	Polyamide (PA 6.6 30 % GR)
Shell	Zinc diecast (ZnAl4Cu1)
Shell plating	gal Cu/Ni

Environmental	
Temperature range	-20 °C to +65 °C

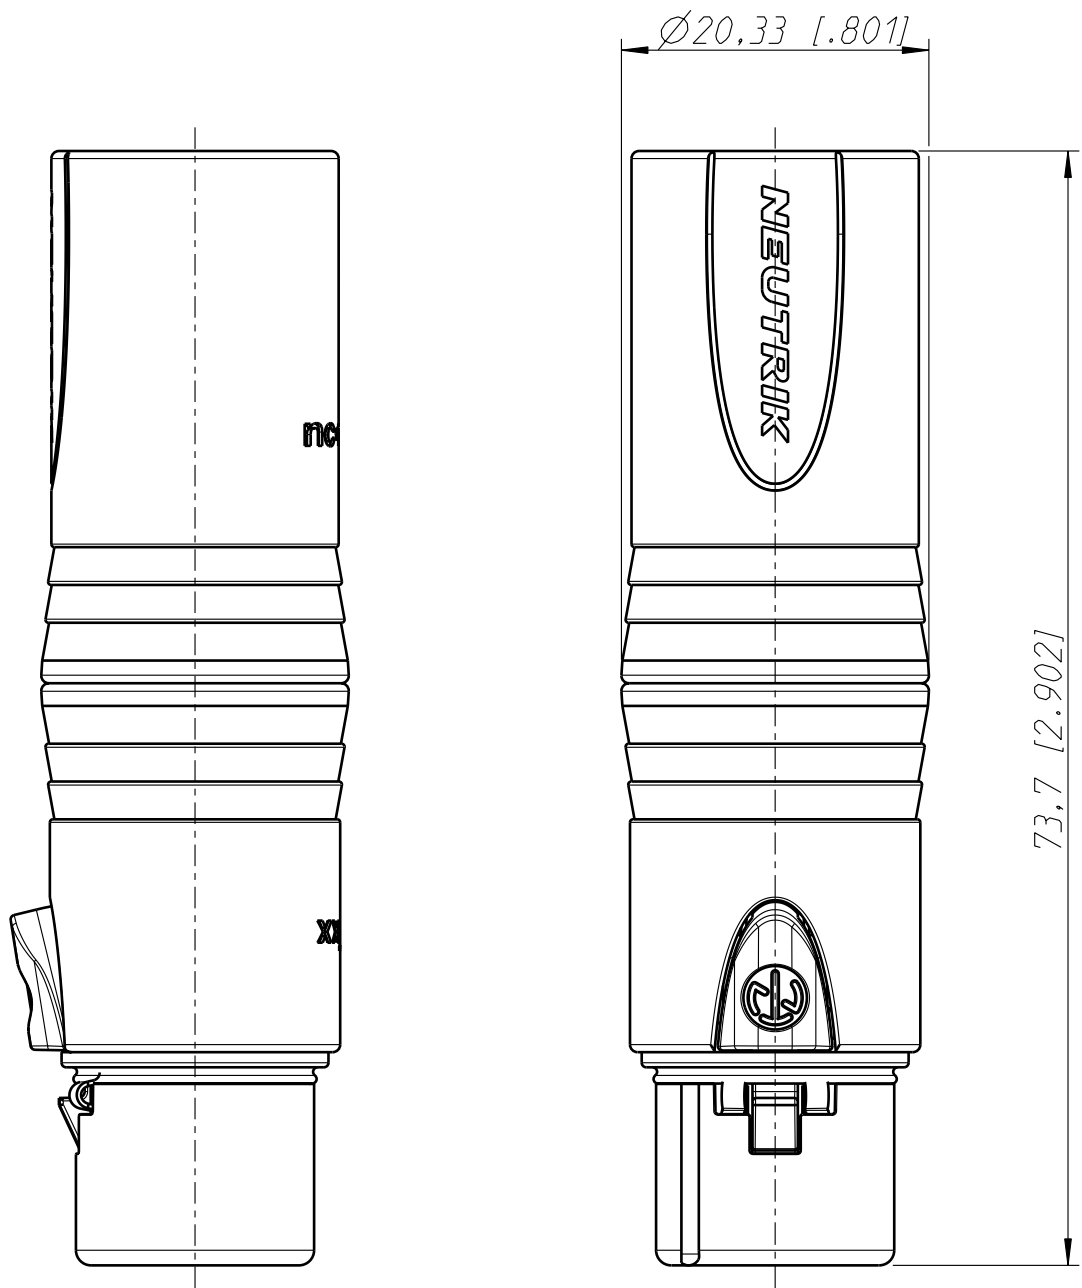

Allgemeintoleranzen ISO 2768-m	Werkstoff KEIN_MAT	Massstab: 2:1 (A4)		Datum	Name
			Gezeichnet	30.01.06	Ender
Zeichnung urheberrechtlich geschuetzt (DIN 34) (C)	-		Freigegeben	-	-
			Geaendert	-	-
Benennung NA3FM NA3FM			Aend.-Nr.	Aend.-Index	
			-		
			Ersatz fuer:	Blatt 1 von 1 Bl.	
NEUTRIK AG FL-9494 SCHAAN			Zeichn. Nr.	ST-NA3FM	