



1/4" Jack adapter



Extention coupler

**s p e a k O N Adapter**



NA4LIX



NL4MMX



NL8MM

**NL4MMX:**

Features permanent secure connection on a speakON cable connector using 2<sup>nd</sup> lock.



Secure Lock!


**NL4MMX + NL4FX:**

(locked on the cable)


Changes gender to male when permanently locked on the cable.




**NA4LJ**

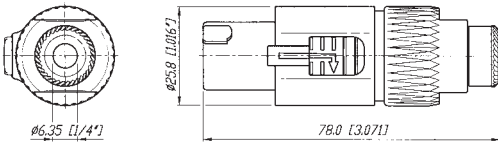

**NL4MM**

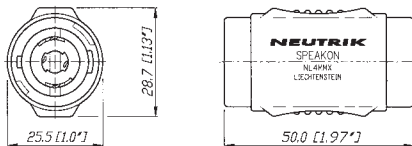

**NL8MM**

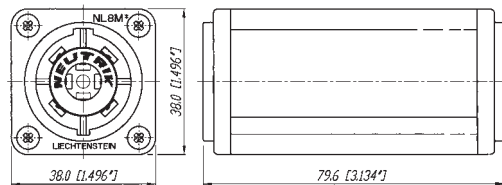

**Product**

Title	NL4MMX
-------	--------

Gender	male
--------	------

**Electrical**

Contact resistance	$\leq 3 \text{ m}\Omega$ (inner) (after lifetime)
--------------------	---

Dielectric strength	4 kVdc (peak)
---------------------	---------------

Insulation resistance	$> 1 \text{ G}\Omega$ (after dampheat)
-----------------------	--

Rated current per contact	15 A rms continuous
---------------------------	---------------------

Rated current per contact	30 A audiosignal, duty cycle 50 %
---------------------------	-----------------------------------

Rated voltage	250 V (Insulation)
---------------	--------------------

Attention	speaKON is NOT to be used as an AC mains or power supply connector!
-----------	---

**Mechanical**

Lifetime	$> 5000$ mating cycles
----------	------------------------

Locking device	Quick Lock
----------------	------------

**Material**

Contact plating	4 $\mu\text{m}$ Ag
-----------------	--------------------

Contacts	Bronze (CuSn6)
----------	----------------

Insert	Polyamide (PA 6 30 % GR)
--------	--------------------------

Shell	Polyamide (PA 6 30 % GR)
-------	--------------------------

**Environmental**

Flammability	UL 94 HB
--------------	----------

Solderability	Complies with IEC 68-2-20
---------------	---------------------------