


P/N: 4011	L	T
4011-03	300MM	±20MM
4011-05	500MM	±20MM
4011-1	1000MM	±30MM
4011-2	2000MM	±30MM

#### WIRE CONNECTION

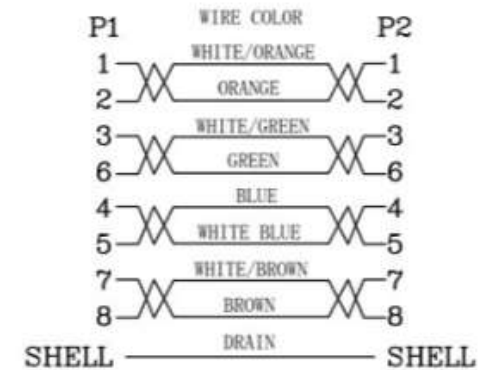

#### NOTES:

- 1.ELECTRICAL TEST:100% OPEN,SHORT & MISS WIRE TEST.
- 2.CONDUCTOR RESISTANCE : 3 OHMS MAX. INSULATOR RESISTANCE: 5M OHMS MIN.
- 3.HI-POT: DC 300V 0.01sec.
4. ALL MATERIAL FIT ROHS STANDARD.

#### REMARK:

1. CABLE:FTP CAT. 6 CABLE 4P\*26AWG (7/0. 16BC)+地线+铝箔+PVC 外被.  
OD:6.0±0.2MM .COLOR:XX.
2. CONN. :P1,P2 8P8C FTP PLUG, GOLD PLATED FU<sup>™</sup> .
3. PACKING: EACH CABLE IN POLY-BAG.
4. MARKING:EUROCONNEX 24AWG\*4P ADVANCED HIGH SPEED CAT6 FTP PATCH CORD TSD/ICE

TOLERANCE							
INCHES	M/M						
. X	.015	.30					
. XX	.010	.10	SCALE	NONE		REV	A
. XXX	.005	.05	UNIT	MM			
			SHEET	1/1			
DRAWN BY	Peter		DATE	19.05.10			
CHECK BY			TITLE		8P8C PLUG/8P8C PLUG		
APPD BY			PART NO.				