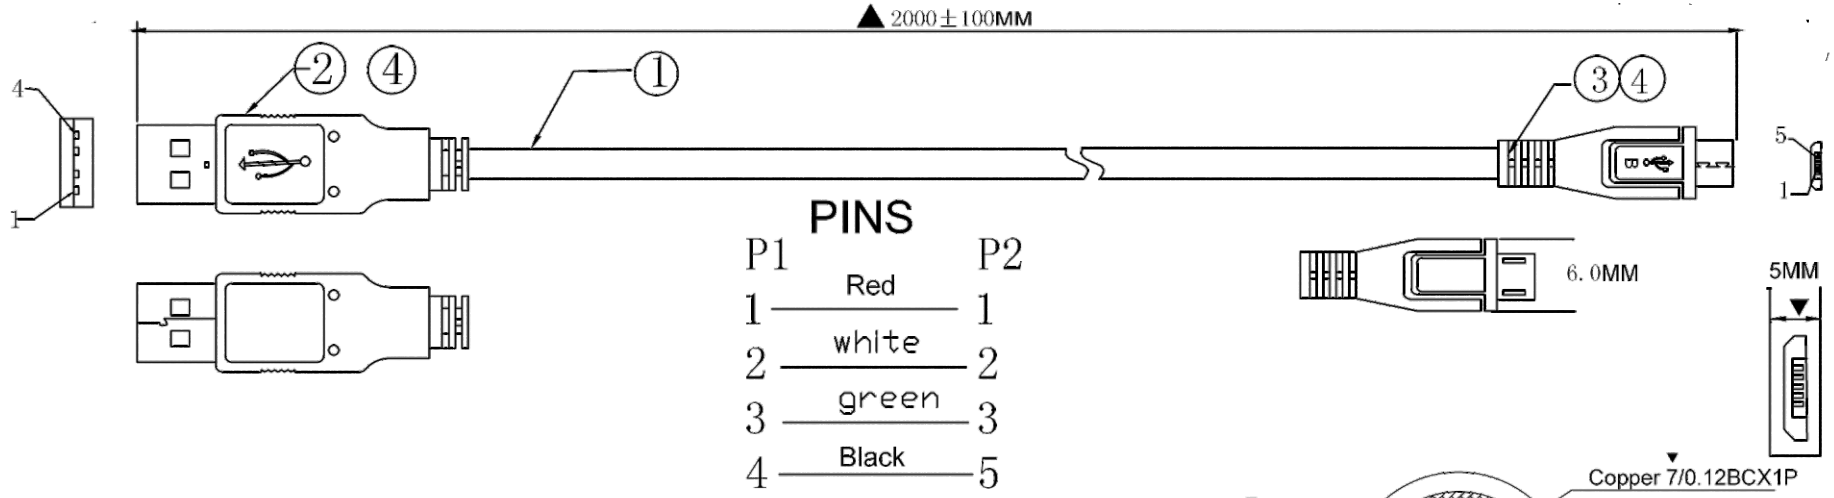

PINS

P1		P2
1	Red	1
2	white	2
3	green	3
4	Black	5
Drain		Drain

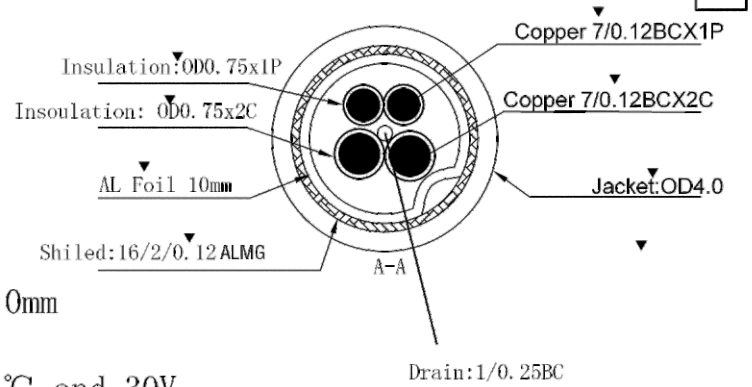

Technology

1. Electrical:

1.1 100% open, short test, and miss wire

1.2 Insulation resistance :3 megohms Hi-pot: DC200v/0.01S

2. Material

2.1 Cable:black 7/0.12BC*1P+7/0.12BC*2C+AL+B32/0.12AL/MG OD:4.0mm

2.2 Connector:USB AM & Micro 5p Nickel

2.3 Jacket:Minimum VW-1 flame rating and minimum ratings of 80℃ and 30V

2.4 All components are RoHS & AWM 2725 compliant.

3. Size

3.1 All size is acording to the drawing

3.2 "▲"is the most important

4. solding should be the same as wiring dragram

4. Packing: Each cable with a tie.

Item NO.	QTY	UNIT	Specification
4	NA	KG	Black PVC 45P
3	1	SET	MIRCO5P Plug
2	1	SET	USB AM Plug
1	6.3	m	Black 28AWG+28AWG+AL+D+32B OD4.0

TOLERANCE	APROBADO	DATE
0 – 10 ±0.05 10 – 99 ±0.5 100 – 999 ±10.0 1000 – 9999 ±100.00 10000 – 99999 ±1000.00	TECNICO	
	COMPRAS	
		REV.
		0

TITLE: Conexión USB a microUSB