69.00±0.20

38.00±0.20

5.80±0.20   14.50±0.20

9.20±0.20

Gold plating

Round cable Black PVC jacket

18.50±0.20
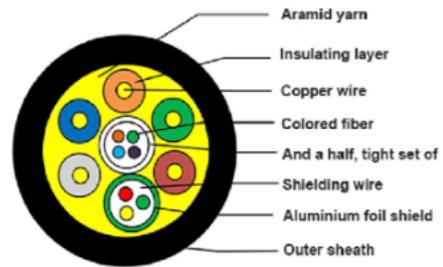
Euroconnex

HDMI   Source

Zinc alloy

8.50±0.20

100M max

NOTE:
- Supports computer resolutions to 4K@60Hz@4:4:4
- Plug and Play
- Compatible with HDMI 2.0 standard.
- Support HDCP2.2@ARC
- Self-detecting function for EDID inforamtion
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated,shell gold plated
- Environmental Specifications:For Indoor use only;
- Operating temperature:-40℃ to 70℃
- Minimum bending radius 20mm
- Max.tension force:100N
- Powered via HDMI devices
- 4core OM3 Multimode Fiber(high speed data)and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant
- Packing:package 1pc reel

Aramid yarn
Insulating layer
Copper wire
Colored fiber
And a half, tight set of
Shielding wire
Aluminium foil shield
Outer sheath

EUROCONNEX

UNLESS OTHERWISE SPECIFIED TOLERANCE				Numero de dibujo		Fecha		Name	HDMI 4K Detacable AOC			
ANG	TOL	DIM	TOL	Cartografía	CLH	2020.06.13		Ref.	0092			
.X	±3.0°	.X	±0.10						Unidades	Ratio	Página	Version
.XX	±2.0°	.XX	±0.05						mm	1:1	1/1	1
.XXX	±1.0°	.XXX	±0.03									