



FLEX-DOT screwdrivers.  
The allrounders for workshop and assembly.

**2 YEAR  
GUARANTEE!**

For full  
professional use!

**DIN  
ISO**




## Ergonomic design for proper handling:

Rounded two-component handle and flexible "FLEX-DOT" nubs for fatigue-proof and comfortable continuous use. Excellent grip attitude also with quick regripping. Combines high torques and pressure forces with balanced design for horizontal and vertical approach.

- 1 Blade symbol and size at end of grip for better identification.
- 2 With transverse hole for hanging up or applying a lever.
- 3 Oil- and acid resistant non-stick special rubber handle.
- 4 Finger recesses for more grip during fast turning.
- 5 Easy to read sizes through laser marking process on matte-chrome plated shafts of chrome silicon manganese molybdenum alloy special steel. Continuously hardened and stress-relieved with a balanced ratio of torsional rigidity and toughness.
- 6 Processed black tip for greatest precision for accepting screws. Also prevents tool from slipping.



### Slotted screwdrivers

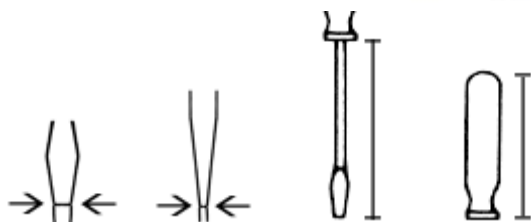

NO	mm	mm	mm	mm	
22 010	3.0	0.5	100	75	①
22 012	4.0	0.8	100	75	①
22 014	5.5	1.0	125	100	①
22 016	6.5	1.2	150	110	②
22 018	8.0	1.2	175	122	② ③
22 020	10.0	1.6	200	122	② ③
22 026	5.5	1.0	25	60	①




Matt-chrome plated blades of chrome vanadium special steel with precision black tip.




With hexagon for applying an open-end spanner as lever (important for tightly-seated screws).

### PHILLIPS screwdrivers



NO	PH	mm	mm	
22 050	0	60	75	
22 052	1	80	100	
22 054	2	100	110	
22 056	3	150	122	③
22 060	2	25	60	


### POZIDRIV PHILLIPS screwdrivers



NO	PZ	mm	mm
22 070	0	60	75
22 072	1	80	100
22 074	2	100	110
22 076	3	150	122

3

### HEX Ball (ball-head) screwdrivers




NO	Inside HEX	mm	mm
22 204	2	100	75
22 206	2.5	100	75
22 208	3	100	75
22 210	4	100	100
22 212	5	100	110
22 214	6	150	110
22 216	8	150	122
22 218	10	185	122



Difficult to access Allen screws can be screwed at a working angle of up to 25° with HEX Ball.


## TTX Tamper TORX screwdrivers

(with frontal hole)



NO	TTX	mm	mm
22 230	8	75	75
22 232	10	100	100
22 234	15	100	100
22 236	20	100	100
22 238	25	100	110
22 240	27	100	110
22 242	30	100	110
22 244	40	100	110

## HEX nut screwdrivers



NO	HEX	mm	mm
22 260	5.5	125	110
22 262	6	125	110
22 264	7	125	110
22 266	8	125	110
22 268	9	125	110
22 270	10	125	110
22 272	11	125	110
22 274	12	125	110
22 276	13	125	110

### See also:

New FLEX-DOT screwdrivers

FLEX-DOT screwdriver combinations

Insulated FLEX-DOT screwdrivers according to VDE standard